



■ **Product Features**

Power tolerance -0/+15 %
Power output range 200-210 Wp
Premium raw materials
Premium workmanship

■ **Certificates**


Product quality EN IEC 61215:2004
Product safety EN IEC 61730-2:2007
Quality management EN ISO 9001:2008
Environmental management EN ISO 14001:2009
Occupational health and safety management
OHSAS 18001:2007

■ **Warranty**

10 years manufacturing defects
12 years limited, 100% output power
25 years limited, 90% output power

SOLVIS photovoltaic modules are high efficiency modules produced from top quality, proven and certified raw materials. Our standard 60 cell module provides high output power, extraordinary durability in harsh conditions, as well as long-term electrical stability. Each module is inspected in detail and labeled before delivery. SOLVIS is a PV module producer based in Croatia. Throughout the partnership with our distributors, we export most of our products for the European clients. Production of high quality photovoltaic modules is based on strict quality control criteria applied in each stage of the manufacturing process. This results in a 25-year limited warranty on output power.

We are dedicated to production of environmentally friendly and affordable source of energy taking greater responsibility for the well being of the society. Production of pertinent modules is a technological challenge demanding engineering and manufacturing expertise. The final product is largely the result of our own production development and research. Constant investments in research and development are the way how SOLVIS is upgrading its technology and products, and ensuring the competitiveness of the company on the global market.



Performance under standard test conditions (1000 W/m², 25 °C, AM 1.5 according to EN 60904-3)

MODEL		SV60-200 12YRG	SV60-205 12YRG	SV60-210 12YRG
Peak power	P _{MPP} [W]	200	205	210
Peak power tolerance	[%]		-0/+15	
Short circuit current	I _{sc} [A]	7,75	7,85	7,94
Open circuit voltage	U _{oc} [V]	34,9	35,2	35,6
Rated current	I _{MPP} [A]	7,25	7,35	7,43
Rated voltage	U _{MPP} [V]	27,6	27,9	28,3
Current and voltage tolerance	[%]		± 10	

THERMAL CHARACTERISTICS


Nominal operating cell temperature (NOCT)	[°C]		48,2 ± 2	
Temperature coefficient of P _{MPP}	[%/K]		-0,41	
Temperature coefficient of I _{sc}	[%/K]		0,05	
Temperature coefficient of U _{oc}	[%/K]		-0,29	

MECHANICAL DATA

Dimensions (H x W x D)	[mm]		1663 x 998 x 35	
Weight	[kg]		21,5	
Solar cells			60 cells, polycrystalline Si, 156 x 156 mm	
Cell encapsulation			Ethylene vinyl acetate (EVA)	
Front			Tempered solar glass, 4 mm	
Back			Composite polyester film	
Frame			Anodized aluminum frame with twin-wall profile and drainage holes	
Junction box			Tyco SOLARLOK with 3 bypass diodes, IP65	
Cable and connectors			Solar cable 4 mm ² , length 1000 mm, Tyco SOLARLOK connectors	

OPERATING CONDITIONS

Temperature range	[°C]		-40 to +85	
Maximum system voltage	[V]		1000	
Maximum surface load capacity			Tested up to 5400 Pa (Snow load test)	
Resistance against hail			Maximum diameter of 25 mm with impact speed of 23 m/s	

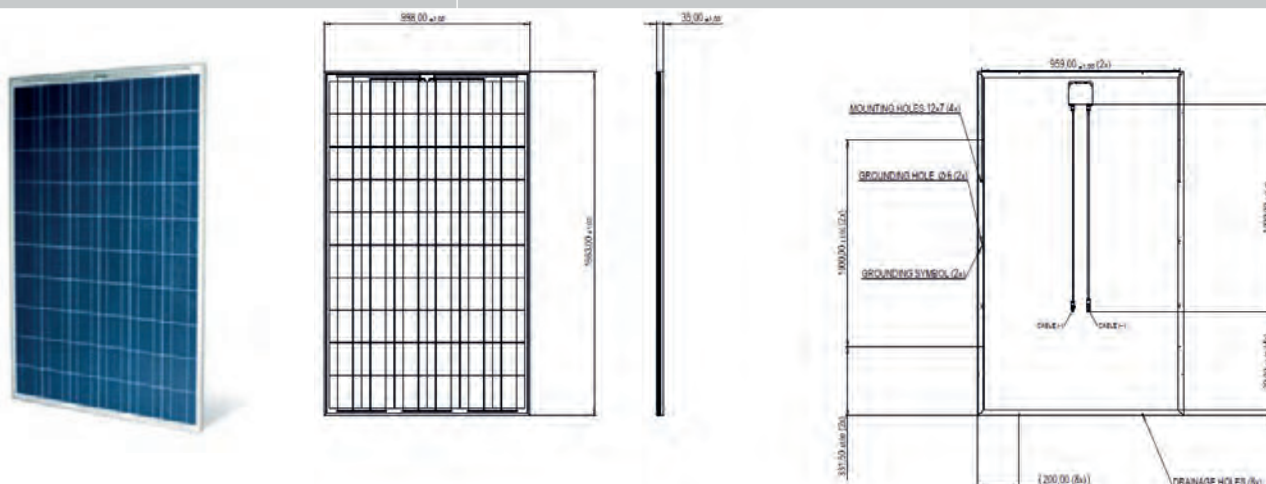

*All dimensions are in mm



All rights reserved. Specifications subject to change without notice.